Data Exchanges, XML, and why the exchange problem is still unsolved

Anthony W. Isenor
Defence R&D Canada – Atlantic
9 Grove Street, Dartmouth, Nova Scotia
Canada B2Y 3Z7

anthony.isenor@drdc-rddc.gc.ca

To understand the exchange of data between systems, we may first consider conceptual models for the exchange of data. The first model relies on a central data structure for passing data among nodes. This is the model commonly used in meteorology and oceanography communities. A second model is more formal, and relies on instances of a common data model. Nodes exchange data with an instance of a common database, with data replicated between the common instance databases. The third conceptual model deals with wrapper software that encapsulates the data asset. Applications query the data asset using an intermediate layer, sometimes called an integrator or mediator, to identify the required data set. The mediator then deals with the critical data issues like consolidation of parameter codes, units, replicate data, metadata content and multiple structures. The resulting data is provided to the user as a coherent and internally consistent data set.

All of these models support data sharing between nodes. The ICES/IOC[1] Study Group on the Development of Marine Data Exchange Systems Using XML (SGXML) examined numerous issues that are important for the sharing of data [1]. In particular, SGXML examined issues related to metadata, parameter dictionaries and data placement in XML structures.

In terms of metadata, the SGXML reviewed numerous international metadata standards for use with oceanographic data. The SGXML contributed to the mapping between standards by developing mappings between the Marine Environmental Data Information (MEDI) referral catalogue system, ISO 19115 and the European Directory of Marine Environmental Data (EDMED). These mappings are important to allow systems the ability to convert metadata records from one standard to another. This will be very important when combining data assets, each using a different metadata standard, or when conversion is required for utilization.

The SGXML also investigated the issue of parameter dictionaries. SGXML contributed to the development of the BODC[2] Parameter Dictionary. This is evident by the BODC dictionary population increase from 7982 entries in May 2002 to 14431 entries in May 2004. SGXML is also responsible for an in depth mapping between BODC and IFREMER[3] dictionaries and BODC and the DONAR/WADI (The Netherlands) data models. Perhaps more importantly, these mappings have continued in other projects and now encompass about 11 dictionaries in total.

The SGXML also made a contribution in the area of XML data structures. One effort resulted in the development of the Keeley Bricks [2]. The initial concept for the generic structures was based on the work of J. Robert Keeley (Marine Environmental Data Service, MEDS) in the 1980s. The initial idea recognized that many data types being delivered to the data centre contained information parts that were consistent across the data types. It was thought that these

---

[1] ICES – International Council for the Exploration of the Sea
IOC – Intergovernmental Oceanographic Commission
[2] BODC - British Oceanographic Data Centre
[3] IFREMER - Institut Francais pour le Recherche et l'Exploitation de la Mer

consistent parts could be formalized into structures, or Bricks. The formal Bricks could then be arranged in multiple ways to address the many structures present in the various ocean data types.

This effort resulted in the identification of 20 Bricks. The Bricks cover aspects of oceanographic data types such as analysis methods, calibration, instrumentation, provenance, unit and variable definition. A single data structure was then developed from the bricks and was found to be capable of storing a diverse set of oceanographic data types including: profile data, current meter data, underway temperature-salinity data, water sample data, acoustic doppler current profiling data (both moored and shipboard) and biological net tow data.

A second data investigation utilized some of the ideas and methods discussed during the SGXML meetings, applying these ideas to the Tokyo Bay Environmental Information Center Project. An XML structure and supporting software was developed and used for data collection efforts that supported the monitoring of Tokyo Bay. This work also utilized components of the Geography Markup Language (GML).

Another GML related effort attempted to incorporate all of the Keeley Brick information into GML. This resulted in a somewhat complicated set of relationships between the Brick content and the GML structure. GML implementation requires an abstraction of oceanographic data types, and thus potentially introduces complications in terminology.

There are also efforts underway to integrate data systems within the oceanographic community. The JCOMM[4] Expert Team on Data Management Practices (ETDMP) is exploring issues related to the identification and aggregation of data sets [3]. A funded ETDMP project is developing a system based on the conceptual wrapper model. The system has multiple layers of data providers, integrators and user applications. Users define their requirements at the user application layer. The integrator layer then directs the queries to appropriate data providers. The data providers retrieve data from the local system, then sending the data back to the integrator layer. The integrator layer will deal with the issues of parameter codes, data replication, etc., and provide the user with a single data set from the multiple sources.

In terms of data semantics related to parameter usage vocabularies, the Marine Metadata Interoperability (MMI) project is making an important contribution to identifying the relationships between parameters in different dictionaries [4]. These dictionaries, which actually represent managed vocabularies, are being aligned and mapped into the Web Ontology Language (OWL) by the MMI project. The OWL implementation allows the searching and discovery of terms by examining up and down the hierarchy formed by the implementation. By doing so, the user has the ability to find previously unknown terminology in other dictionaries that match the search term. As well, tools being developed under MMI allow users to create and manage groups of terms for their particular needs. Thus, users may define groups of similar terms, from multiple dictionaries, that have particular meaning to the user.

In the data exchange process, there are many important issues. Some of the international efforts addressing particular exchange issues are described in this summary paper. In all of these efforts, the critical underlying issue is an understanding of the data content (Figure 1). The difficulty in understanding the content is often related to the supporting metadata. Often, the supporting metadata descriptions are incomplete or use varied semantic descriptions and different vocabularies. The assets are also highly distributed and stored in many different data structures

---

[4] JCOMM – Joint WMO/IOC Commission on Oceanography and Marine Meteorology
WMO – World Meteorological Organization

and software formats. All of these factors can contribute to the loss or misinterpretation of the data content. Only when data exchange is seamless from a semantic perspective, will the exchange problem truly be solved.

1. Isenor, Anthony W. and Roy K. Lowry. 2005. Final Report of the ICES/IOC Study Group on the Development of Marine Data Exchange Systems using XML. DRDC Atlantic ECR 2005-005. March 2005.

2. Isenor, Anthony W., J. Robert Keeley and Joe Linguanti. 2003. Developing an eXtensible Markup I anguage (XML) Application for DFO Marine Data Exchange via the Web. DRDC Atlantic ECR 2003-025. May 2003.

3. Mikhailov, Nikolay, Evgeny Vyazilov, Sergey Belov, and Sergey Sukhonosov. 2005. JCOMM/IODE ETDMP Pilot Project, The Technology Prototype for the End-To-End Marine Data Management. Basic Solution, Development Status and Use for Supporting the Marine Activity. Unpublished manuscript.

4. Marine Metadata Interoperability Project. 2005. See http://marinemetadata.org/

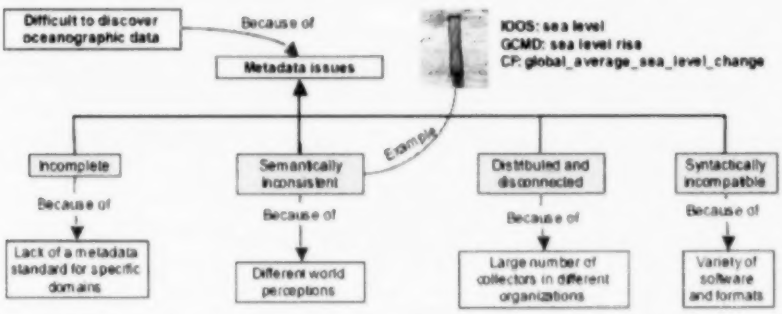

Figure 1: Schematic showing the difficulties associated the discovery process.

Image adapted from "HOW: Hydrologic Ontology for the Web". Luis Bermudez, Michael Piasecki, Dec. 2003. (AGU Poster.)

Defence Research and Development Canada | Recherche et développement pour la défense Canada

Canada

TITLE: Data Exchanges, XML, and why the Exchange Problem is Still Unsolved (Échanges de Données, XML, et Pourquoi le Problème des Échanges n'a pas été Résolu)

PERSONAL AUTHOR: Isenor, A.W.

CORPORATE AUTHOR: Defence R&D Canada - Atlantic, Dartmouth NS (CAN)

ABSTRACT: A description of models that support the combining of data from multiple sources is provided. A model supported by a data structure, as well as one supported by a full database, is described. The marine community efforts thus far have involved data structures and as such, data structure examples are given. These include the efforts of the ICES/IOC Study Group on XML (SGXML) development of the Keeley Bricks, Geography Markup Language (GML), and the efforts of the JCOMM Expert Team on Data Management Practices (ETDMP). The XML implementation of these data structures allows easy transfer, but this shifts the problem to an issue of 'data understanding' or semantics. Typical semantic problems include parameter code issues, units and metadata standards. Focusing on the parameter code issue, the Marine Metadata Interoperability (MMI) Project is briefly described. This project is attempting to provide interoperability between data terms by mapping and harmonizing parameter usage and parameter discovery vocabularies.

Il y a un résumé français ici.

IDENTIFIERS: XML;GML;data exchange;OWL;Ontology Web Language;Marine Metadata Interoperability;MMI;vocabulary;dictionary

REPORT NUMBER: DRDC-ATLANTIC-SL-2005-217; Scientific Literature

REPORT DATE: 27 Sep 2005

NUMBER OF PAGES : 3

DRDKIM N°: CA026547

CANDIS N°: 524434

Format(s):Electronic Document(PDF)